

## Atlas Precured Resin Coated Proppant (PRC)

**ATLAS Precured Resin Coated (PRC)** products offer an excellent price-to-performance ratio when proppant flowback is not a concern. Our exclusive resin complex provides protection from harsh well conditions and reduces or eliminates fines migration in the fracture. The durable nature of our coating significantly reduces embedment versus uncoated propping agents like hard ceramic proppants, and because our coating is non-reactive it reduces scale formation. All products from Atlas are coated on a premium Northern White sand substrate.

- PRC products are 2.6 - 2.8% resin by weight - limiting cost without sacrificing performance
- PRC products are not designed to prevent proppant flowback. For proppant flowback prevention please see our CRC-E and CRC-C product lines

TESTS - UNITS	TYPICAL PROPERTIES
Krumbein Shape Factor-Sphericity	0.7-0.8
Loss on Ignition	2.6%-2.8%
Turbidity (NTU)	< 200
Acid Solubility	< 0.3%
Absolute Volume (gal/lb)	.047-.048
Particle Size Distribution	Meets or exceeds API RP-56
Color	Gold
Physical State	Free Flowing Solid

API Mesh Size	20/40	40/70
Bulk Density (lb/cu.ft)	100.51	98.63
Specific Gravity	2.57	2.50
<b>Unconfined Compressive Strength:</b>		
Crush Resistance at 8,000 psi	<=3%	<=2%
pH Water Extract ml (Buffer)	9 ml	9 ml



**Disclaimer and No Warranty Statement:** Atlas Resin Proppants LLC can give no assurance or makes no warranty that the information contained herein is current, accurate or complete or warranty any results obtained through the use of this product. The information, recommendations, products, or methods set forth herein were believed by Atlas Resin Proppants LLC to be accurate at the time of preparation or obtained from sources believed to be reliable but it makes no expressed or implied warranties for the use, or performance of product. The documents are not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling, transportation, storage and use of products represented here. Atlas Resin Proppants LLC does not control the conditions under which the user uses, handles, stores or transports ATLAS products. Material safety data sheets are provided for products referenced in this document. Atlas Resin Proppants LLC does not control the use of these products and it is the responsibility of the user to train and inform those associated with the safe product handling and use.

## Atlas Precured Resin Coated Proppant (PRC)

CONDUCTIVITY							
MD-FT AT 2 lb/ft <sup>2</sup> (9.8 kg/m <sup>2</sup> ); 250°F (121°C)							
	Closure Stress psi						
	2,000	4,000	6,000	8,000	10,000	12,000	14,000
PRC 20/40	3,417	2,894	1,969	1,168	655		
PRC 40/70	800	720	550	410	250		

PERMEABILITY							
Darcy							
	Closure Stress psi						
	2,000	4,000	6,000	8,000	10,000	12,000	14,000
PRC 20/40	183	159	110	67	39		
PRC 40/70	43	39	31	24	16		

\* Data points represent the median value of accumulated Stim-Lab data

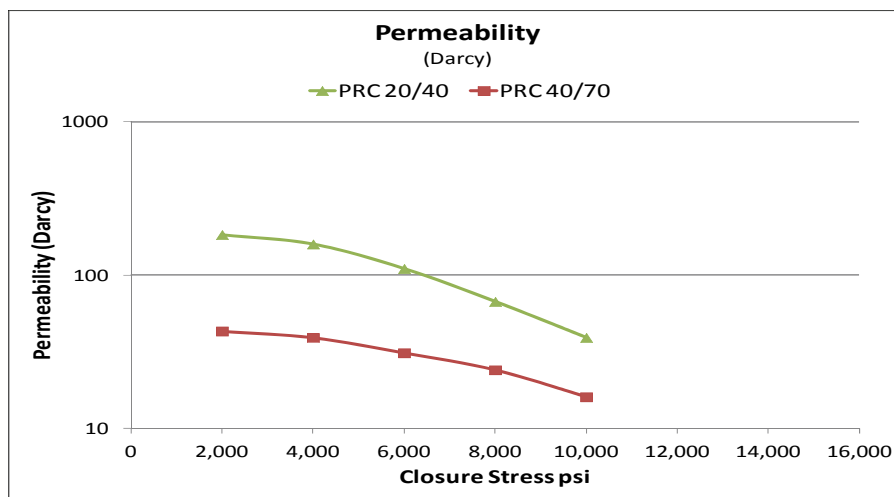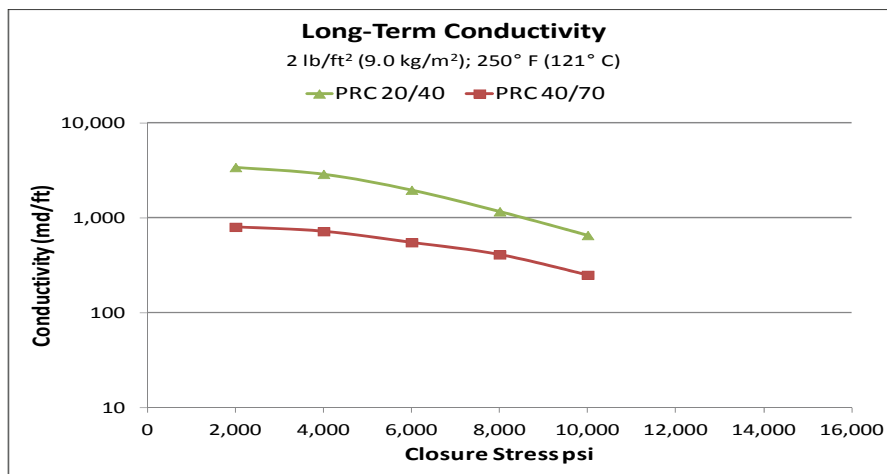

RESIN COATED SILICA SAND PRODUCTS  
DANGER



These products have been classified, following the Globally Harmonized System (GHS) of Classifying and Labeling Chemicals criteria, as a Category 1A Carcinogen, a Category 1 Specific Target Organ Toxicity (following repeated exposures), and a Category 2B Eye Irritant. For Industrial Use Only. DO NOT USE THIS PRODUCT FOR BLASTING OR AS AN ABRASIVE. DO NOT PNEUMATICALLY UNLOAD AT A PRESSURE EXCEEDING 5 PSI SO AS TO AVOID ABRADING THE PRODUCT. DO NOT BREATHE DUST.

Read the specific Safety Data Sheet (SDS) before using and follow applicable local, state and federal health and safety standards. The SDSs for the various Resin Coated Silica Sand products are available online at [www.atlasresinproppants.com](http://www.atlasresinproppants.com) or by calling 715-662-2400. March 19, 2013, Revision C